



1		2		3		4		5		6			
PRODUCT NO.		RoHS compliant		Note:						REV.	ECN NO.	DR	DATE
DSDP03LHGETR													

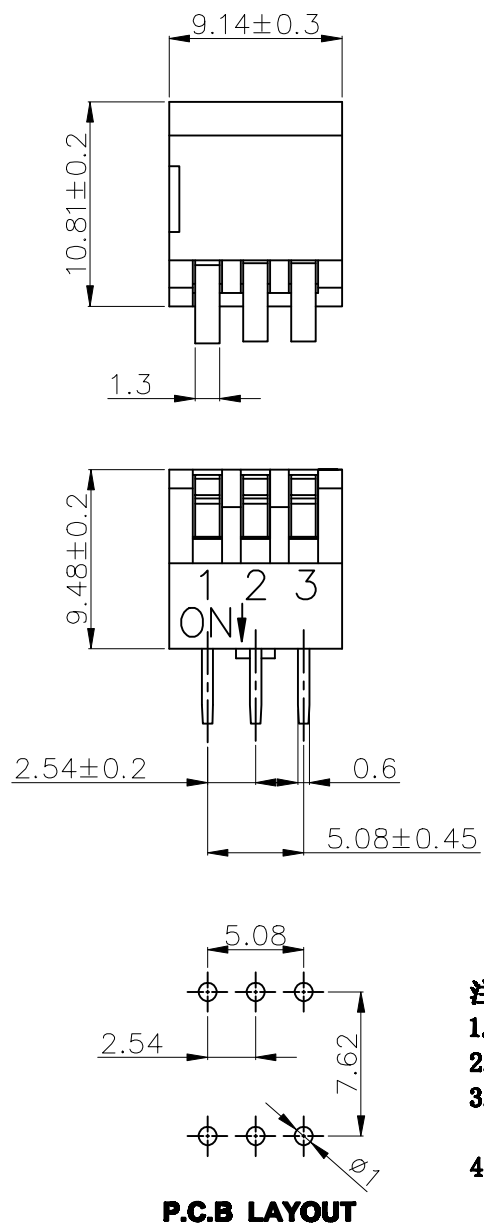

- Note:**
1. All dimensions are in millimeters.
 2. General tolerance: $\pm 0.2\text{mm}$.
 3. Material:
 - Base:UL94V-0 PBT Thermoplastic(Black).
 - Cover:UL94V-0 PBT Thermoplastic(Black/Red/Blue).
 - Actuators:UL94V-0 PBT Thermoplastic(White).
 - Contact plating:Gold plating over nickel.
 - Pitting material:Epoxy.
 4. Electrical
 - Electrical:2000 Operations per switch 24/VDC, 25mA.
 - Non-Swithing Rating:100mA, 50/VDC.
 - Swithing Rating:25mA, 24/VDC
 - Contact Resistance:100 m Ω Max.at initial.
 5. Mechanical
 - Mechanical life:2000 Operations per switch.
 - Stroke:30° .
 - Operation Temp:-20℃ to 70℃.
 - Storage Temp:-40℃ to 85℃.

6. PART NUMBER DESCRIPTION:

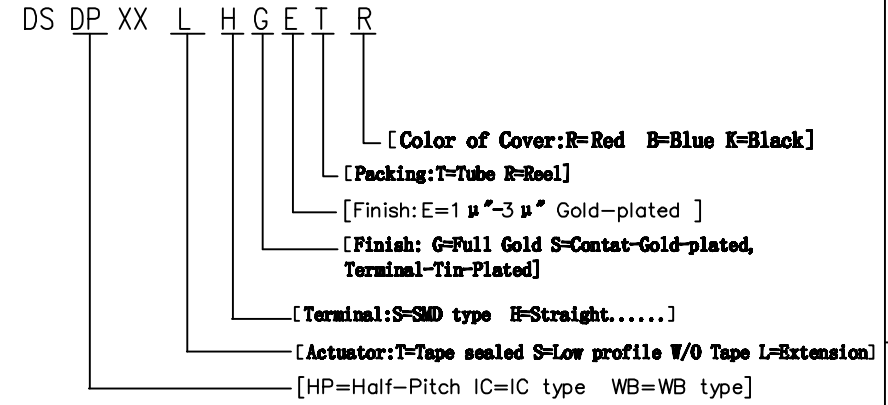

- 注意:**
1. 波峰焊: 推荐焊锡温度在 $270^\circ\text{C} \pm 5^\circ\text{C}$, 浸锡时间为5~6秒钟.
 2. 手工焊: 使用30瓦烙铁控制温度在 320°C , 焊接时间大约2~3秒钟.
 3. 拨柄位置: 产品焊接时, 请将产品的拨柄置于OFF端, 能给予产品更好的接触性能.
 4. 清洗过程: 清洗使用超音波方式, 能给予更好的效果.

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	东莞市广督实业有限公司 DongGuan Kingtek Industrial Co., Ltd.	
LINER	ANGLES	PROJECTION	TITLE	
.0 $\pm$ 0.40	0. $\pm$ 1°		BY DSDP SERIES PITCH 2.54mm	
.00 $\pm$ 0.30	.0 $\pm$ 0.5°		PRODUCT FAMILY DSDP SERIES	
.000 $\pm$ 0.20	.00 $\pm$		PRAT NO. DSDP03LHGETR	
DESIGN	LU ER XIN	2013/07/02	FILE NO. DSDP03LHGETR-A	
DRAWING			SIZE UNIT SCALE SHEET REV.	
CHECK			A4 mm FIT 1 OF 1 A	
APPND.				