

绕线贴片功率电感—SWRH-B 系列

Wire Wound SMD Power Inductors – SWRH – B Series



工作温度
Operating Temp

◆ -40°C ~+125°C

特征
Features

◆ 高饱和电流, 低 DCR
◆ 适合表面贴装
◆ 闭合磁路结构设计, 减少漏磁

◆ High saturation current, low DCR
◆ Suitable for surface mounting equipment
◆ Close magnetic circuit design reduce leakage

用途
Applications

◆ 录像机、液晶显示器、笔记本电脑、通讯设备、办公自动化等电子设备的电源扼流
◆ Power supply choke for small electrical equipments such as DVC, LCD display, notebook, communication equipment, OA equipment and so on.


产品型号

Product Identification


1	2	3	4	5	6
SWRH	0602	B	-3R3	N	T
1	2		3	6	
分类 Type		外形尺寸 External Dimensions		结构 Configuration	
SWRH 绕线贴片功率电感 Wire Wound SMD Type Power Inductors (With Metallic Base)		0602~1209		B B Type Base	
4		5		6	
公称电感量 Nominal Inductance		电感公差 Inductance Tolerance		包装 Packing	
Example Nominal Value		M ± 20%		T 编带 Tape Carrier Package	
3R3 3.3μH		N ± 30%			
100 10μH					
101 100μH					

外观尺寸


Shape and Dimensions

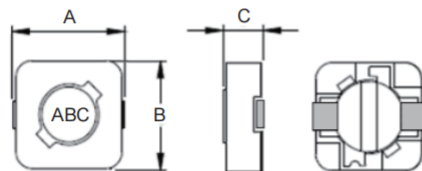


SWRH0602B/0604B

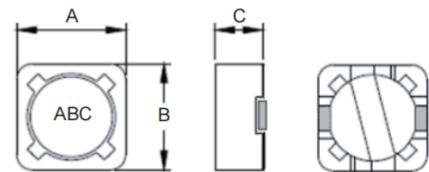

SWRH0703B/0704B

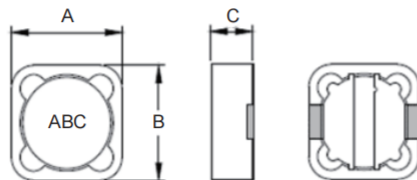

SWRH1004B/SWRH1204B/1205B/1207B/1209B



外观尺寸

Shape and Dimensions

Unit: mm

Series	A max.	B max.	C max.	I typ.	J typ.	H typ.
SWRH0602B	7.0	6.8	3.0	1.4	4.6	1.9
SWRH0604B	7.0	6.8	5.0	1.4	4.6	1.9
SWRH0703B	7.8	7.8	4.0	1.6	4.8	2.2
SWRH0704B	7.8	7.8	5.0	1.6	4.8	2.2
SWRH1004B	10.5	10.5	5.0	2.0	6.8	4.4
SWRH1204B	12.5	12.5	5.0	2.9	7.0	5.4
SWRH1205B	12.5	12.5	6.0	2.9	7.0	5.4
SWRH1207B	12.5	12.5	8.0	2.9	7.0	5.4
SWRH1209B	12.5	12.5	10.0	2.9	7.0	5.4

规格特性

Specifications

WRH0602B TYPE

型号 Part Number	电感量 Inductance	L 测试条件 L Test Condition	直流电阻 Max. DC Resistance	额定电流 Max. Rated Current
单位 Units	μH	Hz, V	Ω	A
符号 Symbol	L	-	DCR	I _r
SWRH0602B-3R3NT	3.3±30%	100k, 0.3V	0.068	1.94
SWRH0602B-4R7NT	4.7±30%	100k, 0.3V	0.080	1.63
SWRH0602B-5R6NT	5.6±30%	100k, 0.3V	0.096	1.40
SWRH0602B-100MT	10±20%	1k, 0.3V	0.150	1.10
SWRH0602B-120MT	12±20%	1k, 0.3V	0.200	1.00
SWRH0602B-150MT	15±20%	1k, 0.3V	0.230	0.90
SWRH0602B-180MT	18±20%	1k, 0.3V	0.270	0.80
SWRH0602B-220MT	22±20%	1k, 0.3V	0.340	0.74
SWRH0602B-270MT	27±20%	1k, 0.3V	0.380	0.66
SWRH0602B-330MT	33±20%	1k, 0.3V	0.450	0.59
SWRH0602B-390MT	39±20%	1k, 0.3V	0.490	0.54
SWRH0602B-470MT	47±20%	1k, 0.3V	0.690	0.50
SWRH0602B-560MT	56±20%	1k, 0.3V	0.780	0.46
SWRH0602B-680MT	68±20%	1k, 0.3V	1.070	0.42
SWRH0602B-820MT	82±20%	1k, 0.3V	1.210	0.38
SWRH0602B-101MT	100±20%	1k, 0.3V	1.390	0.34
SWRH0602B-121MT	120±20%	1k, 0.3V	1.900	0.31
SWRH0602B-151MT	150±20%	1k, 0.3V	2.180	0.28
SWRH0602B-181MT	180±20%	1k, 0.3V	2.770	0.26
SWRH0602B-221MT	220±20%	1k, 0.3V	3.120	0.23
SWRH0602B-271MT	270±20%	1k, 0.3V	4.380	0.22
SWRH0602B-331MT	330±20%	1k, 0.3V	4.940	0.19

SWRH0604B TYPE

型号 Part Number	电感量 Inductance	L 测试条件 L Test Condition	直流电阻 Max. DC Resistance	额定电流 Max. Rated Current
单位 Units	μH	Hz, V	Ω	A
符号 Symbol	L	-	DCR	I _r
SWRH0604B-100MT	10±20%	1k, 0.3V	0.120	1.35
SWRH0604B-120MT	12±20%	1k, 0.3V	0.130	1.20
SWRH0604B-150MT	15±20%	1k, 0.3V	0.180	1.10

规格特性 Specifications

SWRH0604B TYPE

型号 Part Number	电感量 Inductance	L 测试条件 L Test Condition	直流电阻 Max. DC Resistance	额定电流 Max. Rated Current
单位 Units	μH	Hz, V	Ω	A
符号 Symbol	L	-	DCR	Ir
SWRH0604B-180MT	18±20%	1k, 0.3V	0.240	1.00
SWRH0604B-220MT	22±20%	1k, 0.3V	0.270	0.91
SWRH0604B-270MT	27±20%	1k, 0.3V	0.300	0.82
SWRH0604B-330MT	33±20%	1k, 0.3V	0.330	0.75
SWRH0604B-390MT	39±20%	1k, 0.3V	0.370	0.69
SWRH0604B-470MT	47±20%	1k, 0.3V	0.520	0.62
SWRH0604B-560MT	56±20%	1k, 0.3V	0.560	0.58
SWRH0604B-680MT	68±20%	1k, 0.3V	0.630	0.52
SWRH0604B-820MT	82±20%	1k, 0.3V	0.710	0.47
SWRH0604B-101MT	100±20%	1k, 0.3V	1.030	0.43
SWRH0604B-121MT	120±20%	1k, 0.3V	1.150	0.39
SWRH0604B-151MT	150±20%	1k, 0.3V	1.680	0.35
SWRH0604B-181MT	180±20%	1k, 0.3V	1.870	0.32
SWRH0604B-221MT	220±20%	1k, 0.3V	2.080	0.29
SWRH0604B-271MT	270±20%	1k, 0.3V	2.370	0.26
SWRH0604B-331MT	330±20%	1k, 0.3V	2.670	0.23
SWRH0604B-391MT	390±20%	1k, 0.3V	2.940	0.22
SWRH0604B-471MT	470±20%	1k, 0.3V	3.930	0.20

SWRH0703B TYPE

型号 Part Number	电感量 Inductance	L 测试条件 L Test Condition	直流电阻 Max. DC Resistance	额定电流 Max. Rated Current
单位 Units	μH	Hz, V	Ω	A
符号 Symbol	L	-	DCR	Ir
SWRH0703B-2R2NT	2.2±30%	100k, 0.3V	0.025	3.00
SWRH0703B-3R3NT	3.3±30%	100k, 0.3V	0.035	2.50
SWRH0703B-4R7NT	4.7±30%	100k, 0.3V	0.031	2.00
SWRH0703B-100MT	10±20%	1k, 0.3V	0.072	1.68
SWRH0703B-120MT	12±20%	1k, 0.3V	0.098	1.52
SWRH0703B-150MT	15±20%	1k, 0.3V	0.130	1.33
SWRH0703B-180MT	18±20%	1k, 0.3V	0.140	1.20
SWRH0703B-220MT	22±20%	1k, 0.3V	0.190	1.07
SWRH0703B-270MT	27±20%	1k, 0.3V	0.210	0.96
SWRH0703B-330MT	33±20%	1k, 0.3V	0.240	0.91
SWRH0703B-390MT	39±20%	1k, 0.3V	0.320	0.77
SWRH0703B-470MT	47±20%	1k, 0.3V	0.360	0.76
SWRH0703B-560MT	56±20%	1k, 0.3V	0.470	0.68
SWRH0703B-680MT	68±20%	1k, 0.3V	0.520	0.61
SWRH0703B-820MT	82±20%	1k, 0.3V	0.690	0.57
SWRH0703B-101MT	100±20%	1k, 0.3V	0.790	0.50
SWRH0703B-121MT	120±20%	1k, 0.3V	0.890	0.49
SWRH0703B-151MT	150±20%	1k, 0.3V	1.270	0.43
SWRH0703B-181MT	180±20%	1k, 0.3V	1.450	0.39
SWRH0703B-221MT	220±20%	1k, 0.3V	1.650	0.35
SWRH0703B-271MT	270±20%	1k, 0.3V	2.310	0.32
SWRH0703B-331MT	330±20%	1k, 0.3V	2.620	0.28
SWRH0703B-391MT	390±20%	1k, 0.3V	2.940	0.26
SWRH0703B-471MT	470±20%	1k, 0.3V	4.180	0.24
SWRH0703B-561MT	560±20%	1k, 0.3V	4.670	0.22

规格特性

Specifications

SWRH0704B TYPE

型号 Part Number	电感量 Inductance	L 测试条件 L Test Condition	直流电阻 Max. DC Resistance	额定电流 Max. Rated Current
单位 Units	μH	Hz, V	Ω	A
符号 Symbol	L	-	DCR	Ir
SWRH0704B-1R0NT	1.0±30%	100k, 0.3V	0.013	9.00
SWRH0704B-1R5NT	1.5±30%	100k, 0.3V	0.0145	7.60
SWRH0704B-2R2MT	2.2±20%	100k, 0.3V	0.018	6.50
SWRH0704B-3R3MT	3.3±20%	100k, 0.3V	0.024	5.60
SWRH0704B-3R6MT	3.6±20%	100k, 0.3V	0.026	5.00
SWRH0704B-4R7MT	4.7±20%	100k, 0.3V	0.030	4.40
SWRH0704B-6R8MT	6.8±20%	100k, 0.3V	0.041	3.00
SWRH0704B-8R2MT	8.2±20%	100k, 0.3V	0.048	2.90
SWRH0704B-100MT	10±20%	1k, 0.3V	0.049	1.84
SWRH0704B-120MT	12±20%	1k, 0.3V	0.058	1.71
SWRH0704B-150MT	15±20%	1k, 0.3V	0.081	1.47
SWRH0704B-180MT	18±20%	1k, 0.3V	0.091	1.31
SWRH0704B-220MT	22±20%	1k, 0.3V	0.110	1.23
SWRH0704B-270MT	27±20%	1k, 0.3V	0.150	1.12
SWRH0704B-330MT	33±20%	1k, 0.3V	0.170	0.96
SWRH0704B-390MT	39±20%	1k, 0.3V	0.230	0.91
SWRH0704B-470MT	47±20%	1k, 0.3V	0.260	0.88
SWRH0704B-560MT	56±20%	1k, 0.3V	0.350	0.75
SWRH0704B-680MT	68±20%	1k, 0.3V	0.380	0.69
SWRH0704B-820MT	82±20%	1k, 0.3V	0.430	0.61
SWRH0704B-101MT	100±20%	1k, 0.3V	0.610	0.60
SWRH0704B-121MT	120±20%	1k, 0.3V	0.660	0.52
SWRH0704B-151MT	150±20%	1k, 0.3V	0.880	0.46
SWRH0704B-181MT	180±20%	1k, 0.3V	0.980	0.42
SWRH0704B-221MT	220±20%	1k, 0.3V	1.170	0.36
SWRH0704B-271MT	270±20%	1k, 0.3V	1.640	0.34
SWRH0704B-331MT	330±20%	1k, 0.3V	1.860	0.32
SWRH0704B-391MT	390±20%	1k, 0.3V	2.850	0.29
SWRH0704B-471MT	470±20%	1k, 0.3V	3.010	0.26
SWRH0704B-561MT	560±20%	1k, 0.3V	3.620	0.23
SWRH0704B-681MT	680±20%	1k, 0.3V	3.820	0.20

SWRH1004B TYPE

型号 Part Number	电感量 Inductance	L 测试条件 L Test Condition	直流电阻 Max. DC Resistance	额定电流 Max. Rated Current
单位 Units	μH	Hz, V	Ω	A
符号 Symbol	L	-	DCR	Ir
SWRH1004B-2R2NT	2.2±30%	100k, 0.3V	0.018	4.00
SWRH1004B-3R8NT	3.8±30%	100k, 0.3V	0.028	3.50
SWRH1004B-4R7NT	4.7±30%	100k, 0.3V	0.035	3.20
SWRH1004B-6R8NT	6.8±30%	100k, 0.3V	0.044	2.80
SWRH1004B-100MT	10±20%	1k, 0.3V	0.050	2.40
SWRH1004B-120MT	12±20%	1k, 0.3V	0.054	2.25
SWRH1004B-150MT	15±20%	1k, 0.3V	0.061	2.00
SWRH1004B-180MT	18±20%	1k, 0.3V	0.084	1.80
SWRH1004B-220MT	22±20%	1k, 0.3V	0.094	1.65
SWRH1004B-270MT	27±20%	1k, 0.3V	0.110	1.45
SWRH1004B-330MT	33±20%	1k, 0.3V	0.150	1.35
SWRH1004B-390MT	39±20%	1k, 0.3V	0.170	1.20
SWRH1004B-470MT	47±20%	1k, 0.3V	0.210	1.10
SWRH1004B-560MT	56±20%	1k, 0.3V	0.230	1.00
SWRH1004B-680MT	68±20%	1k, 0.3V	0.260	0.93
SWRH1004B-820MT	82±20%	1k, 0.3V	0.360	0.84
SWRH1004B-101MT	100±20%	1k, 0.3V	0.410	0.76
SWRH1004B-121MT	120±20%	1k, 0.3V	0.450	0.70
SWRH1004B-151MT	150±20%	1k, 0.3V	0.640	0.63
SWRH1004B-181MT	180±20%	1k, 0.3V	0.840	0.57
SWRH1004B-221MT	220±20%	1k, 0.3V	0.960	0.52
SWRH1004B-271MT	270±20%	1k, 0.3V	1.070	0.47
SWRH1004B-331MT	330±20%	1k, 0.3V	1.370	0.43
SWRH1004B-391MT	390±20%	1k, 0.3V	1.550	0.39
SWRH1004B-471MT	470±20%	1k, 0.3V	1.740	0.36

规格特性 Specifications

SWRH1204B TYPE

型号 Part Number	电感量 Inductance	L 测试条件 L Test Condition	直流电阻 Max. DC Resistance	额定电流 Max. Rated Current
单位 Units	μH	Hz, V	Ω	A
符号 Symbol	L	-	DCR	I _r
SWRH1204B-1R0NT	1.0±30%	100k, 0.3V	0.010	7.00
SWRH1204B-2R2NT	2.2±30%	100k, 0.3V	0.014	5.70
SWRH1204B-3R3NT	3.3±30%	100k, 0.3V	0.015	5.20
SWRH1204B-4R7NT	4.7±30%	100k, 0.3V	0.018	4.90
SWRH1204B-5R6NT	5.6±30%	100k, 0.3V	0.020	4.50
SWRH1204B-6R8NT	6.8±30%	100k, 0.3V	0.023	4.20
SWRH1204B-8R2NT	8.2±30%	100k, 0.3V	0.026	4.00
SWRH1204B-100MT	10±20%	1k, 0.3V	0.028	3.80
SWRH1204B-120MT	12±20%	1k, 0.3V	0.038	3.50
SWRH1204B-150MT	15±20%	1k, 0.3V	0.050	3.20
SWRH1204B-180MT	18±20%	1k, 0.3V	0.057	3.10
SWRH1204B-220MT	22±20%	1k, 0.3V	0.066	2.90
SWRH1204B-270MT	27±20%	1k, 0.3V	0.080	2.80
SWRH1204B-330MT	33±20%	1k, 0.3V	0.097	2.70
SWRH1204B-390MT	39±20%	1k, 0.3V	0.132	2.10
SWRH1204B-470MT	47±20%	1k, 0.3V	0.160	1.90
SWRH1204B-560MT	56±20%	1k, 0.3V	0.190	1.80
SWRH1204B-680MT	68±20%	1k, 0.3V	0.220	1.50
SWRH1204B-820MT	82±20%	1k, 0.3V	0.260	1.30
SWRH1204B-101MT	100±20%	1k, 0.3V	0.310	1.20
SWRH1204B-121MT	120±20%	1k, 0.3V	0.380	1.10
SWRH1204B-151MT	150±20%	1k, 0.3V	0.530	0.95
SWRH1204B-181MT	180±20%	1k, 0.3V	0.620	0.85
SWRH1204B-221MT	220±20%	1k, 0.3V	0.700	0.80
SWRH1204B-271MT	270±20%	1k, 0.3V	0.870	0.60
SWRH1204B-331MT	330±20%	1k, 0.3V	0.990	0.50
SWRH1204B-471MT	470±20%	1k, 0.3V	1.100	0.25

SWRH1205B TYPE

型号 Part Number	电感量 Inductance	L 测试条件 L Test Condition	直流电阻 Max. DC Resistance	额定电流 Max. Rated Current
单位 Units	μH	Hz, V	Ω	A
符号 Symbol	L	-	DCR	I _r
SWRH1205B-1R0NT	1.0±30%	100k, 0.3V	0.010	8.00
SWRH1205B-2R2NT	2.2±30%	100k, 0.3V	0.014	7.80
SWRH1205B-2R4NT	2.4±30%	100k, 0.3V	0.014	7.50
SWRH1205B-3R3NT	3.3±30%	100k, 0.3V	0.014	6.80
SWRH1205B-4R7NT	4.7±30%	100k, 0.3V	0.020	5.60
SWRH1205B-5R8NT	5.8±30%	100k, 0.3V	0.020	5.20
SWRH1205B-8R2NT	8.2±30%	100k, 0.3V	0.021	4.40
SWRH1205B-100MT	10±20%	1k, 0.3V	0.025	4.00
SWRH1205B-120MT	12±20%	1k, 0.3V	0.027	3.50
SWRH1205B-150MT	15±20%	1k, 0.3V	0.030	3.30
SWRH1205B-180MT	18±20%	1k, 0.3V	0.034	3.00
SWRH1205B-220MT	22±20%	1k, 0.3V	0.036	2.80
SWRH1205B-270MT	27±20%	1k, 0.3V	0.051	2.30
SWRH1205B-330MT	33±20%	1k, 0.3V	0.057	2.10
SWRH1205B-390MT	39±20%	1k, 0.3V	0.068	2.00
SWRH1205B-470MT	47±20%	1k, 0.3V	0.075	1.80
SWRH1205B-560MT	56±20%	1k, 0.3V	0.110	1.70
SWRH1205B-680MT	68±20%	1k, 0.3V	0.120	1.50
SWRH1205B-820MT	82±20%	1k, 0.3V	0.140	1.40
SWRH1205B-101MT	100±20%	1k, 0.3V	0.160	1.30

规格特性

Specifications

SWRH1205B TYPE

型号 Part Number	电感量 Inductance	L 测试条件 L Test Condition	直流电阻 Max. DC Resistance	额定电流 Max. Rated Current
单位 Units	μH	Hz, V	Ω	A
符号 Symbol	L	-	DCR	Ir
SWRH1205B-121MT	120±20%	1k, 0.3V	0.170	1.10
SWRH1205B-151MT	150±20%	1k, 0.3V	0.230	1.00
SWRH1205B-181MT	180±20%	1k, 0.3V	0.290	0.90
SWRH1205B-221MT	220±20%	1k, 0.3V	0.400	0.80
SWRH1205B-271MT	270±20%	1k, 0.3V	0.460	0.75
SWRH1205B-331MT	330±20%	1k, 0.3V	0.510	0.68
SWRH1205B-391MT	390±20%	1k, 0.3V	0.690	0.65
SWRH1205B-471MT	470±20%	1k, 0.3V	0.770	0.58
SWRH1205B-561MT	560±20%	1k, 0.3V	0.860	0.54
SWRH1205B-681MT	680±20%	1k, 0.3V	1.200	0.48
SWRH1205B-821MT	820±20%	1k, 0.3V	1.340	0.43
SWRH1205B-102MT	1000±20%	1k, 0.3V	1.800	0.40

SWRH1207B TYPE

型号 Part Number	电感量 Inductance	L 测试条件 L Test Condition	直流电阻 Max. DC Resistance	额定电流 Max. Rated Current
单位 Units	μH	Hz, V	Ω	A
符号 Symbol	L	-	DCR	Ir
SWRH1207B-1R0NT	1.0±30%	100k, 0.3V	0.009	10.00
SWRH1207B-2R2NT	2.2±30%	100k, 0.3V	0.012	8.00
SWRH1207B-2R7NT	2.7±30%	100k, 0.3V	0.013	8.00
SWRH1207B-3R3NT	3.3±30%	100k, 0.3V	0.013	8.00
SWRH1207B-3R9NT	3.9±30%	100k, 0.3V	0.013	7.50
SWRH1207B-4R5NT	4.5±30%	100k, 0.3V	0.016	6.80
SWRH1207B-4R7NT	4.7±30%	100k, 0.3V	0.016	6.80
SWRH1207B-6R1NT	6.1±30%	100k, 0.3V	0.018	6.60
SWRH1207B-6R5NT	6.5±30%	100k, 0.3V	0.018	6.60
SWRH1207B-6R8NT	6.8±30%	100k, 0.3V	0.019	6.60
SWRH1207B-7R6NT	7.6±30%	100k, 0.3V	0.020	5.90
SWRH1207B-8R2NT	8.2±30%	100k, 0.3V	0.020	5.60
SWRH1207B-100MT	10±20%	1k, 0.3V	0.021	5.40
SWRH1207B-120MT	12±20%	1k, 0.3V	0.024	4.90
SWRH1207B-150MT	15±20%	1k, 0.3V	0.027	4.50
SWRH1207B-180MT	18±20%	1k, 0.3V	0.039	3.90
SWRH1207B-220MT	22±20%	1k, 0.3V	0.043	3.60
SWRH1207B-270MT	27±20%	1k, 0.3V	0.046	3.40
SWRH1207B-330MT	33±20%	1k, 0.3V	0.065	3.00
SWRH1207B-390MT	39±20%	1k, 0.3V	0.073	2.75
SWRH1207B-470MT	47±20%	1k, 0.3V	0.100	2.50
SWRH1207B-560MT	56±20%	1k, 0.3V	0.110	2.35
SWRH1207B-680MT	68±20%	1k, 0.3V	0.140	2.10
SWRH1207B-820MT	82±20%	1k, 0.3V	0.160	1.95
SWRH1207B-101MT	100±20%	1k, 0.3V	0.220	1.70
SWRH1207B-121MT	120±20%	1k, 0.3V	0.250	1.60
SWRH1207B-151MT	150±20%	1k, 0.3V	0.280	1.42
SWRH1207B-181MT	180±20%	1k, 0.3V	0.350	1.30
SWRH1207B-221MT	220±20%	1k, 0.3V	0.390	1.16
SWRH1207B-271MT	270±20%	1k, 0.3V	0.560	1.06
SWRH1207B-331MT	330±20%	1k, 0.3V	0.640	0.95
SWRH1207B-391MT	390±20%	1k, 0.3V	0.700	0.88
SWRH1207B-471MT	470±20%	1k, 0.3V	0.980	0.79
SWRH1207B-561MT	560±20%	1k, 0.3V	1.070	0.73

规格特性 Specifications

SWRH1207B TYPE

型号 Part Number	电感量 Inductance	L 测试条件 L Test Condition	直流电阻 Max. DC Resistance	额定电流 Max. Rated Current
单位 Units	μH	Hz, V	Ω	A
符号 Symbol	L	-	DCR	Ir
SWRH1207B-681MT	680±20%	1k, 0.3V	1.460	0.67
SWRH1207B-821MT	820±20%	1k, 0.3V	1.640	0.60
SWRH1207B-102MT	1000±20%	1k, 0.3V	1.820	0.55

SWRH1209B TYPE

型号 Part Number	电感量 Inductance	L 测试条件 L Test Condition	直流电阻 Max. DC Resistance	额定电流 Max. Rated Current
单位 Units	μH	Hz, V	Ω	A
符号 Symbol	L	-	DCR	Ir
SWRH1209B-1R0NT	1.0±30%	100k, 0.3V	0.006	11.00
SWRH1209B-1R8NT	1.8±30%	100k, 0.3V	0.008	10.20
SWRH1209B-2R2NT	2.2±30%	100k, 0.3V	0.009	9.50
SWRH1209B-3R3NT	3.3±30%	100k, 0.3V	0.010	9.00
SWRH1209B-4R7NT	4.7±30%	100k, 0.3V	0.012	8.50
SWRH1209B-5R6NT	5.6±30%	100k, 0.3V	0.014	8.00
SWRH1209B-6R8NT	6.8±30%	100k, 0.3V	0.015	7.90
SWRH1209B-8R2NT	8.2±30%	100k, 0.3V	0.017	7.30
SWRH1209B-100MT	10±20%	1k, 0.3V	0.018	6.50
SWRH1209B-120MT	12±20%	1k, 0.3V	0.022	6.30
SWRH1209B-150MT	15±20%	1k, 0.3V	0.032	5.80
SWRH1209B-180MT	18±20%	1k, 0.3V	0.035	5.50
SWRH1209B-220MT	22±20%	1k, 0.3V	0.038	5.20
SWRH1209B-270MT	27±20%	1k, 0.3V	0.040	5.00
SWRH1209B-330MT	33±20%	1k, 0.3V	0.052	4.40
SWRH1209B-390MT	39±20%	1k, 0.3V	0.066	4.20
SWRH1209B-470MT	47±20%	1k, 0.3V	0.072	3.80
SWRH1209B-560MT	56±20%	1k, 0.3V	0.090	3.40
SWRH1209B-680MT	68±20%	1k, 0.3V	0.102	3.00
SWRH1209B-820MT	82±20%	1k, 0.3V	0.112	2.80
SWRH1209B-850MT	85±20%	1k, 0.3V	0.125	2.60
SWRH1209B-101MT	100±20%	1k, 0.3V	0.135	2.50
SWRH1209B-121MT	120±20%	1k, 0.3V	0.170	2.30
SWRH1209B-151MT	150±20%	1k, 0.3V	0.190	2.20
SWRH1209B-181MT	180±20%	1k, 0.3V	0.250	1.90
SWRH1209B-221MT	220±20%	1k, 0.3V	0.315	1.70
SWRH1209B-271MT	270±20%	1k, 0.3V	0.410	1.50
SWRH1209B-331MT	330±20%	1k, 0.3V	0.450	1.40
SWRH1209B-391MT	390±20%	1k, 0.3V	0.600	1.30
SWRH1209B-471MT	470±20%	1k, 0.3V	0.820	1.20
SWRH1209B-561MT	560±20%	1k, 0.3V	0.900	1.10
SWRH1209B-681MT	680±20%	1k, 0.3V	1.200	1.00
SWRH1209B-821MT	820±20%	1k, 0.3V	1.320	0.85
SWRH1209B-102MT	1000±20%	1k, 0.3V	1.350	0.78
SWRH1209B-122MT	1200±20%	1k, 0.3V	1.400	0.75