

Transient Voltage Suppressor

Features

- IEC 61000-4-2(ESD)±25KV(air), ±25KV(contact)
- IEC61000-4-5(Lightning) 8A (8/20uS)
- IEC61000-4-4(EFT) 40A (5/50nS)
- 184Watts peak pulse power (tp=8/20μS)
- Low clamping voltage
- Weight approx. 1.0 mg
- Moisture sensitivity level: Level 1
- Small package: DFN1006-2L

Exterior



DFN1006-2L

Application information

- Smart Phone and Tablet PC
- TV and Set Top Box
- Wearable Devices
- PDA

Package (top view)



Agency Approvals

Icon	Description
RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003
	Mean lead free

Schematic



Part Number and Electrical Parameter

Part Number	I _{DRM} @V _{DRM}		V _{BR} ^① @I _R		V _c @I _{pp} ^②		V _c @I _{pp} ^②		R _{DYN} @TLP ^③	V _c @I _{pp} TLP ^③		Co ^④
	μA	V	V	mA	V	A	V	A	Ω	V	A	pF
	MAX		MIN		MAX		MAX		TYP	TYP		TYP
BV-FA08ZCT	0.5	8	10	1	14	1	23	8.0	0.33	16.5	16	10

Absolute maximum ratings measured at T= 25°C RH = 45%-75% (unless otherwise noted).

① V_{BR} is measured at I_R=1mA

② Surge Waveform: 8/20μS.

③ TLP parameter: Z₀ = 50Ω, tp = 100ns, tr = 1ns, RDYN is calculated from 4A to16A

④ Off-state capacitance is measured in VDC=0V, VRMS=0.3V, f=1MHz

Transient Voltage Suppressor

Part Numbering System

Mark

BV FA 08 Z C T
(1) (2) (3) (4) (5) (6)


- (1) Bencent Transient Voltage Suppressor
- (2) Package:DFN1006-2L
- (3) Off-state Voltage: 8V
- (4) Normal Capacitance
- (5) Bidirectional
- (6) Bencent internal code





D8: Part Number



V-I Curve

Parameters	Definition
V_C	Clamping voltage
I_{PP}	Surge waveform 8/20us
V_{DRM}	Stand-off Voltage
V_{BR}	Breakdown Voltage
I_{DRM}	Reverse Leakage Current
I_R	Test current
V_{SB}	Snapback voltage
I_{SB}	Test current
P_{pp}	Peak Pulse Power Dissipation

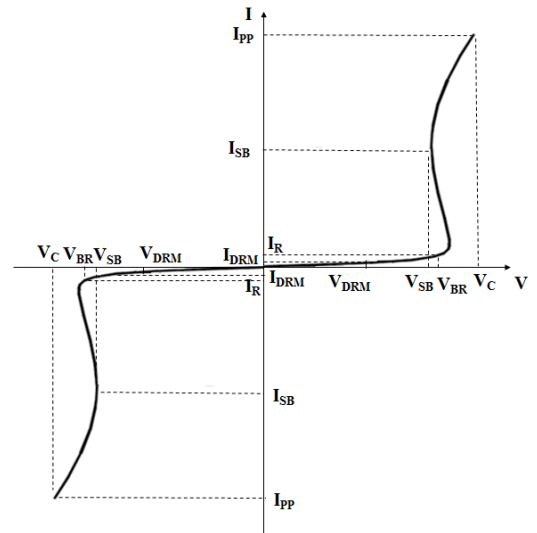

Typical Characteristics

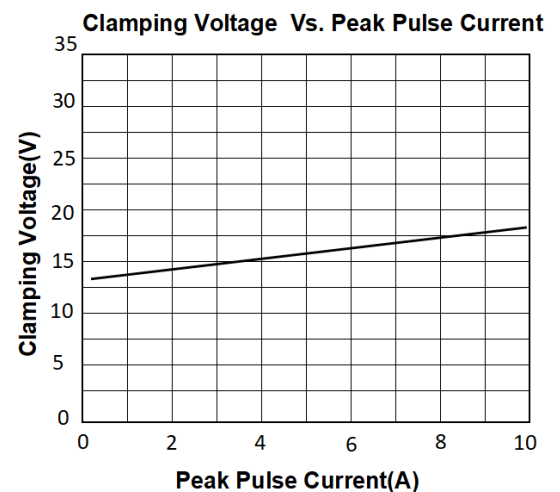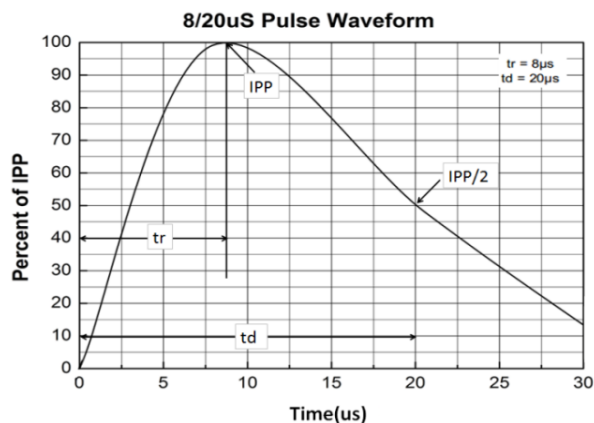

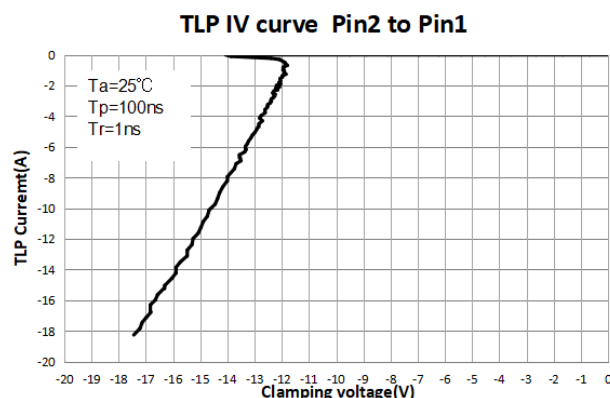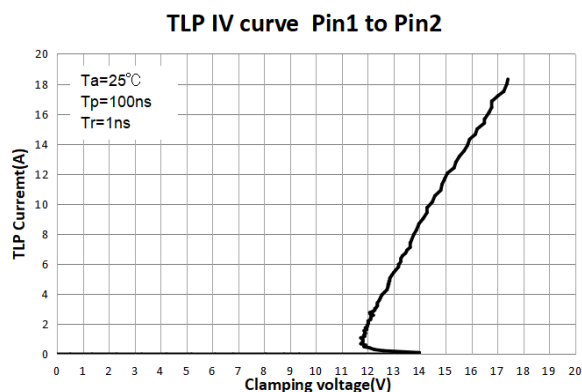

Thermal Considerations

symbol	Parameter	Value	Unit
T_J	Operating Junction Temperature Range	-55 to +125	°C
T_S	Storage Temperature Range	-55 to +150	°C

Environmental Characteristics


Testing items	Technical standards
High temperature Reverse Bias Test	Temperature: 125±3°C Bias=80%V _{DRM} Time:168H
High Temperature Life Test	Temperature: 150°C Time:168H
High-low Temperature Cycle test	Temperature: From -55°C to125°C Dwell time : 30min,10~100cycles
High Temperature &High Humidity Test	Temperature: 85°C Humidity:85% Time:168H
Pressure cooker Test	Temperature: 121°C, 2atm. Humidity:100% Time:24H
Resistance of soldering heat	Temperature: 260±5°C Time of dip soldering: 10s, 3times

Note: The above testing items can be specified by customer's special request

Transient Voltage Suppressor


Version: A0 2022-01-05

Product Dimensions

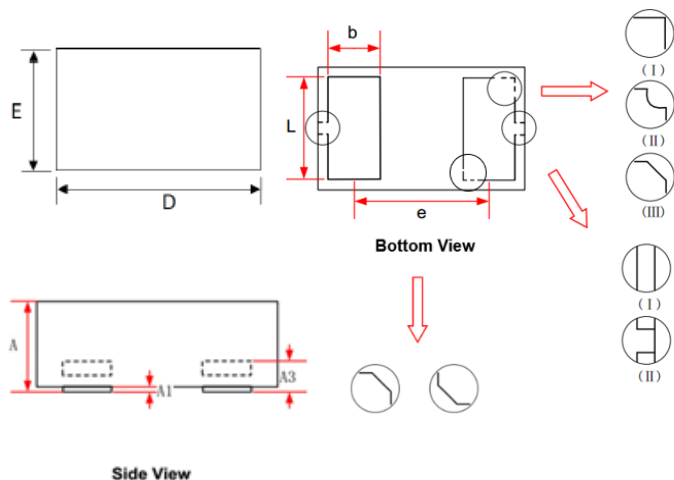

REF [Ⓢ]	mm [Ⓢ]	inch [Ⓢ]
A [Ⓢ]	0.35~0.55 [Ⓢ]	0.014~0.022 [Ⓢ]
A1 [Ⓢ]	0.00~0.05 [Ⓢ]	0.000~0.002 [Ⓢ]
A3 [Ⓢ]	0.125REF [Ⓢ]	0.005REF [Ⓢ]
D [Ⓢ]	0.95~1.10 [Ⓢ]	0.037~0.043 [Ⓢ]
E [Ⓢ]	0.55~0.70 [Ⓢ]	0.022~0.028 [Ⓢ]
L [Ⓢ]	0.45~0.55 [Ⓢ]	0.018~0.022 [Ⓢ]
e [Ⓢ]	0.65BSC [Ⓢ]	0.026BSC [Ⓢ]
b [Ⓢ]	0.15~0.35 [Ⓢ]	0.006~0.014 [Ⓢ]


Recommended Soldering Pad

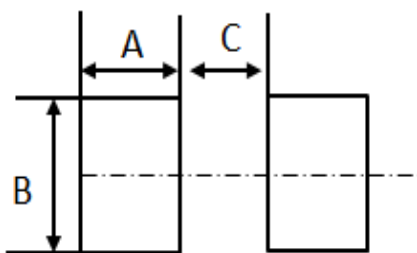

REF	mm	inch
A	0.35	0.014
B	0.60	0.024
C	0.35	0.014

Reflow Profile


Reflow Condition		Pb-Free assembly
Pre Heat	Temperature Min	150°C
	Temperature Max	200°C
	Time (min to max)	60 – 180 secs
Average ramp up rate (Liquid) T _{amp} (T _L) to peak		3°C/s max
T _S (max) to T _L - Ramp-up Rate		3°C/s max
Reflow	- Temperature (T _L) (Liquid)	217°C
	- Temperature (T _L)	60 – 150 secs
Peak Temperature (T _P)		260+0/-5 °C
Time within 5°C of actual peak Temperature (T _P)		30secs
Ramp-down Rate		6°C/s max
Time 25°C to peak Temperature (T _P)		8 mins max.
Do not exceed		260°C

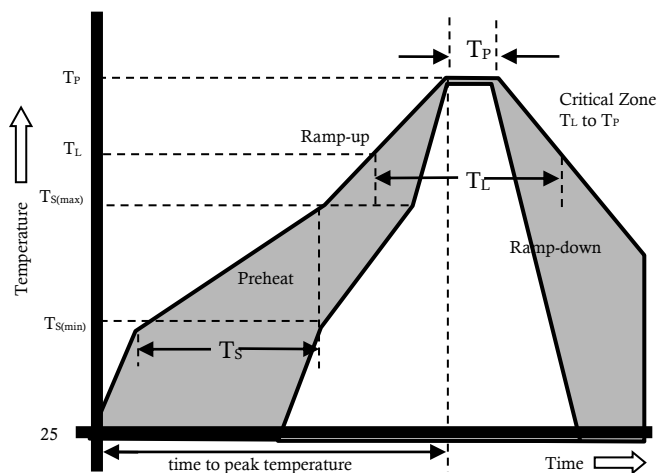

Transient Voltage Suppressor

Version: A0 2022-01-05

Package Reel Information

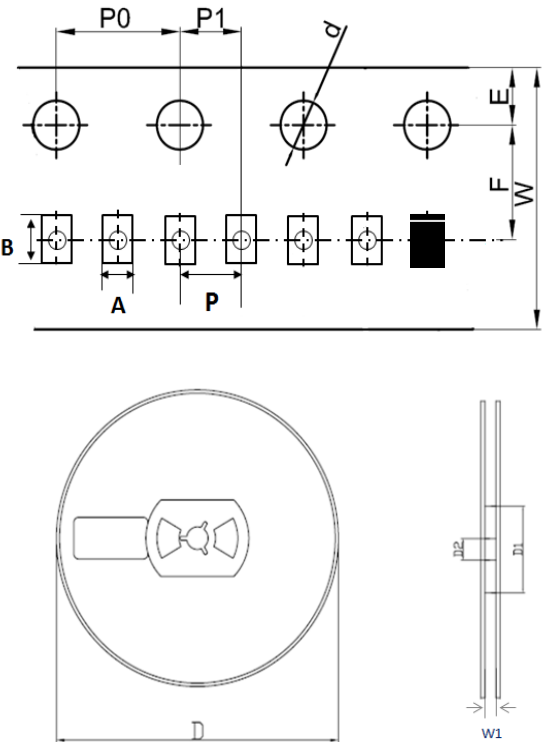

REF	mm	inch
A	0.70+/-0.05	0.028+/-0.002
B	1.15+/-0.05	0.045+/-0.002
d	1.50+0.1/-0	0.059+0.004/-0
D	178.00+/-2.00	7.008+/-0.079
D1	55.00+/-3.00	2.165+/-0.118
D2	13.00+/-0.50	0.512+/-0.020
E	1.75+/-0.10	0.069+/-0.004
F	3.50+/-0.20	0.138+/-0.008
P	2.00+/-0.20	0.079+/-0.008
P0	4.00+/-0.20	0.157+/-0.008
P1	2.00+/-0.20	0.079+/-0.008
W	8.00+/-0.20	0.315+/-0.008
W1	9.50+/-1.00	0.374+/-0.039

OUTLINE	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)	CARTON SIZE(mm)		
				L	W	H
TAPING	10,000	300,000	178	380	220	205